


Beam Clamp – ZBC11

Formed Steel Beam Clamp With J-Hook

Standard finish is Electro-Galvanized (EG).
 Design loads are the same as model ZBC10.
 Maximum rod size: ½" (12 mm).
 Maximum flange thickness: ¾" (19 mm).
 If swivel is required, use ZBC12 Swivel Nut.

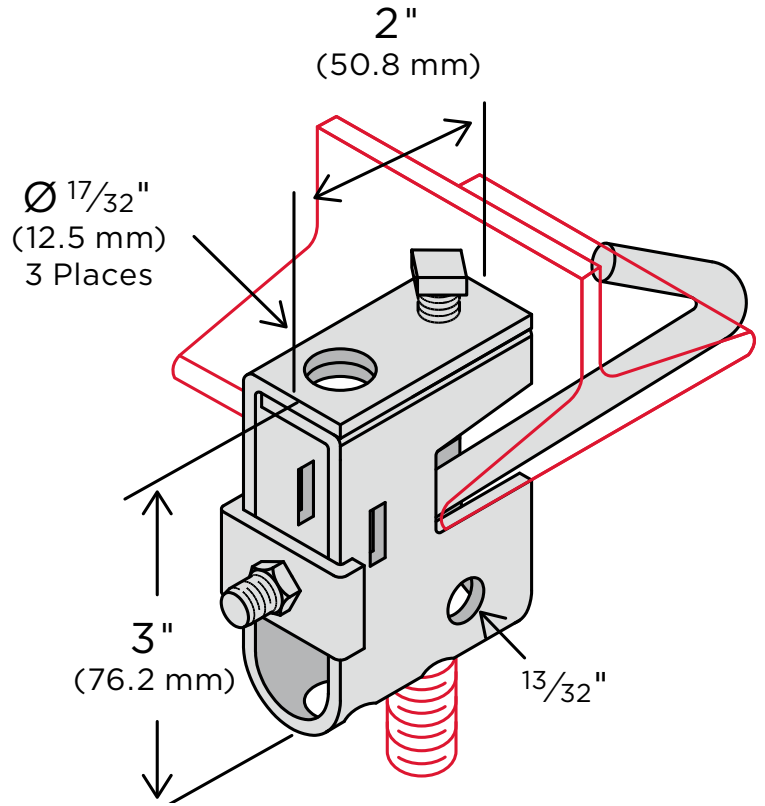

CATALOG NUMBER	WEIGHT		W
	lbs.	in.	mm
ZBC110600EG	0.78	3-6	76-152
ZBC110900EG	0.83	6-9	152-228
ZBC111200EG	0.88	9-12	228-305

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most ZI-Strut products. Thickness of applied zinc is between 0.2 mils and 0.5 mils (5.1 µm to 12.7 µm). Coatings on ZI-Strut EG products meet ASTM B633 SC1 Type III.

Note: Specifications subject to change without notice.

SUBMITTAL INFORMATION

PROJECT: _____ CONTRACTOR: _____ DATE: _____

ENGINEER: _____ SPECIFICATION REFERENCE: _____ SYSTEM TYPE: _____

LOCATIONS: _____ COMMENTS: _____

ZI-112823