


# Hardware — ZRC

## Rod Coupling

Standard finish is Electro-Galvanized (EG).

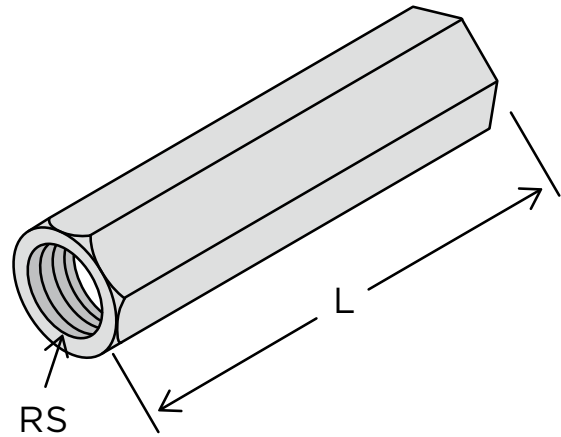

CATALOG NUMBER	RS	L		HEX SIZE		WEIGHT
		in.	mm	in.	lbs.	
ZRC0025EG	¼"-20	7/8	22.2	3/8	.03	
ZRC0037EG	3/8"-16	1¾	44.4	9/16	.08	
ZRC0050EG	½"-13	1¾	44.4	11/16	.12	

### Material Specifications and Finishes

Carbon Steel — ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG — Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most ZI-Strut products. Thickness of applied zinc is between 0.2 mils and 0.5 mils (5.1 µm to 12.7 µm). Coatings on ZI-Strut EG products meet ASTM B633 SC1 Type III.

S4 — 304 Stainless Steel — ASTM A240 (Type 304)

S6 — 316 Stainless Steel — ASTM A240 (Type 316)  
316 Stainless Steel Nuts — ASTM A276-03

Note: Specifications subject to change without notice.

## SUBMITTAL INFORMATION

PROJECT: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_ DATE: \_\_\_\_\_

ENGINEER: \_\_\_\_\_ SPECIFICATION REFERENCE: \_\_\_\_\_ SYSTEM TYPE: \_\_\_\_\_

LOCATIONS: \_\_\_\_\_ COMMENTS: \_\_\_\_\_

ZI-113023